


FIVE VALVE MANIFOLDS

DIRECT MOUNT (PIPE TO FLANGE)

MODEL CODE : K5VN

Five Valve Manifold Special Series to accommodate any half DIN 19213 interface complaint pressure transmitter. 2 inlets NPT female at front and 2 outlets Flange at back side DIN 19213. Vent/test connection at front, equalizing bonnets at top side, isolating bonnets at left and right side-venting bonnet at top.

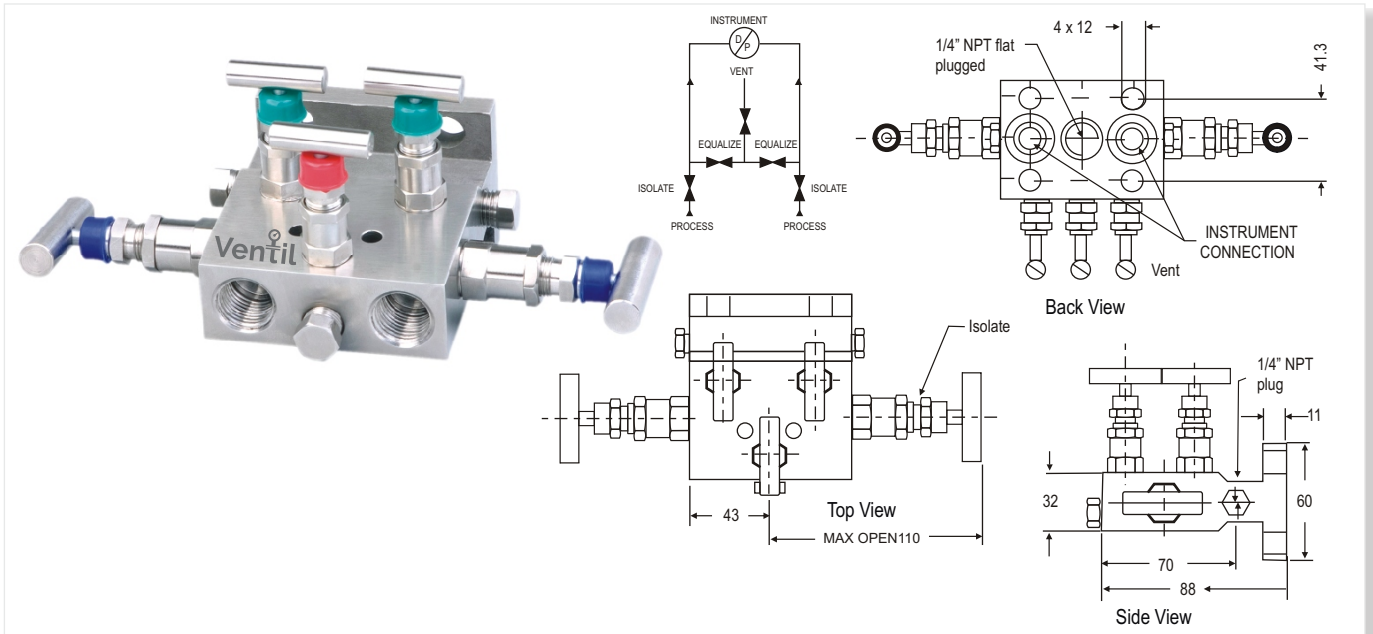


Standard Connection

Product	Process Side	Instrument Side	Vent/Test
K5VN	1/2" NPT female	flanged	1/4" NPT female

MODEL CODE : K5VT

With threaded horizontal port inlets and Flange port outlets. The vent/test ports are positioned on the bottom side. The isolating and venting bonnets are positioned on the left and right hand side and the equalizing bonnet is positioned on the top side. Designed for direct mounting.

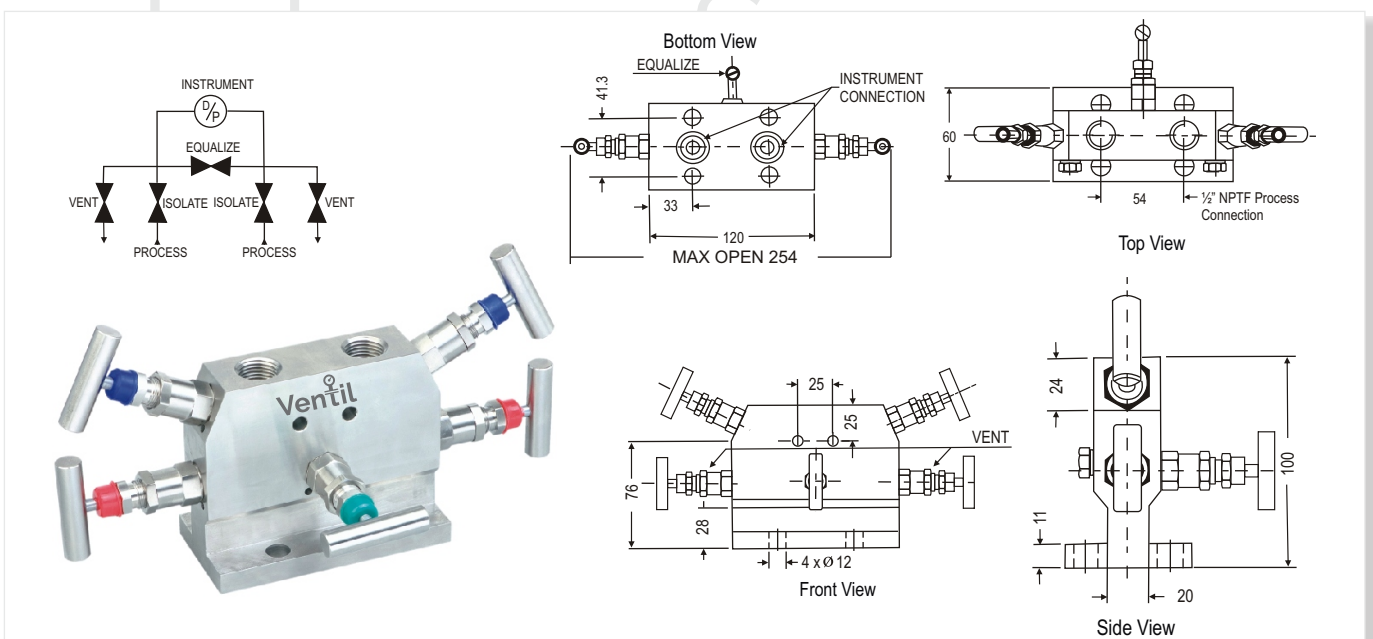


Standard Connection

Product	Process Side	Instrument Side	Vent/Test
K5VT	1/2" NPT female	flanged	1/4" NPT female

DIRECT MOUNT (PIPE TO FLANGE)

MODEL CODE : K5VK

With threaded female ports on front side for instrument connection along with extended Flange for process connection. The two vent bonnets along with equalizing bonnet is positioned on the top side. The two isolation bonnets are positioned on left and right hand sides.

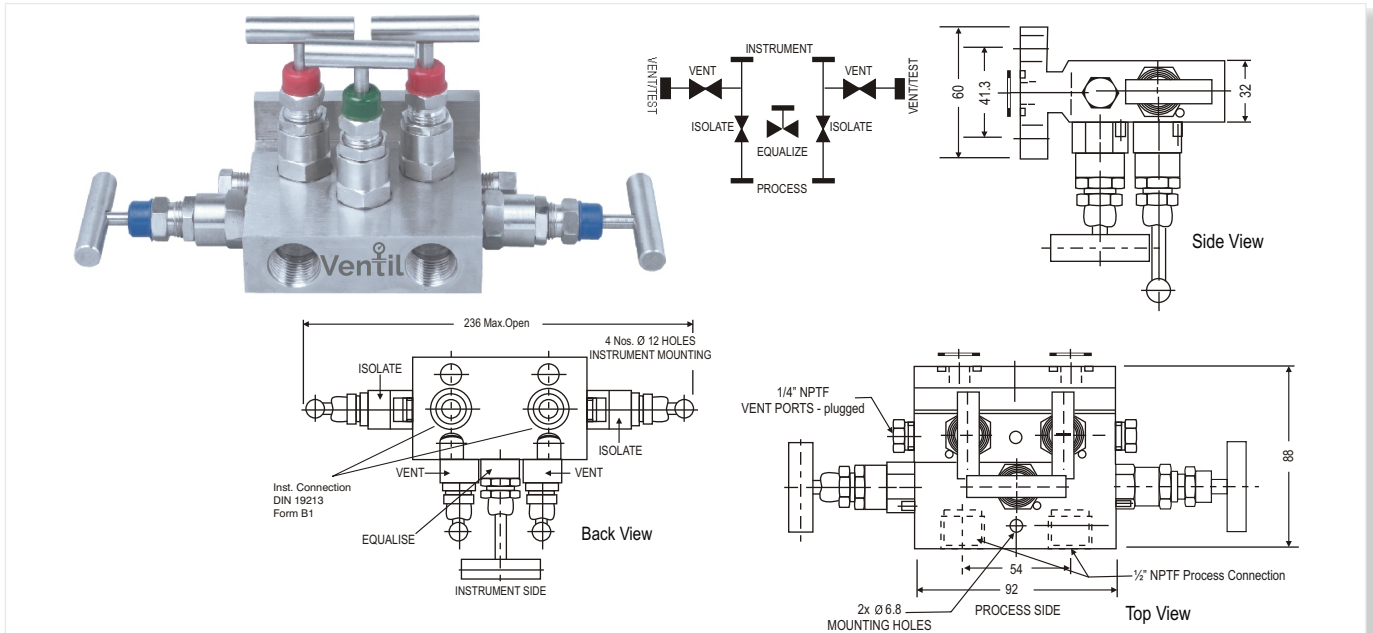


Standard Connection

Product	Process Side	Instrument Side	Vent/Test
K5VK	1/2" NPT female	Flange	1/4" NPT female

MODEL CODE : K5VH

With Flange horizontal port inlets and Flange port outlets. The vent/test ports are positioned on the bottom side. The isolating and venting bonnets are positioned on the left and right hand side and the equalizing bonnet is positioned on the top side. Designed for direct mounting.

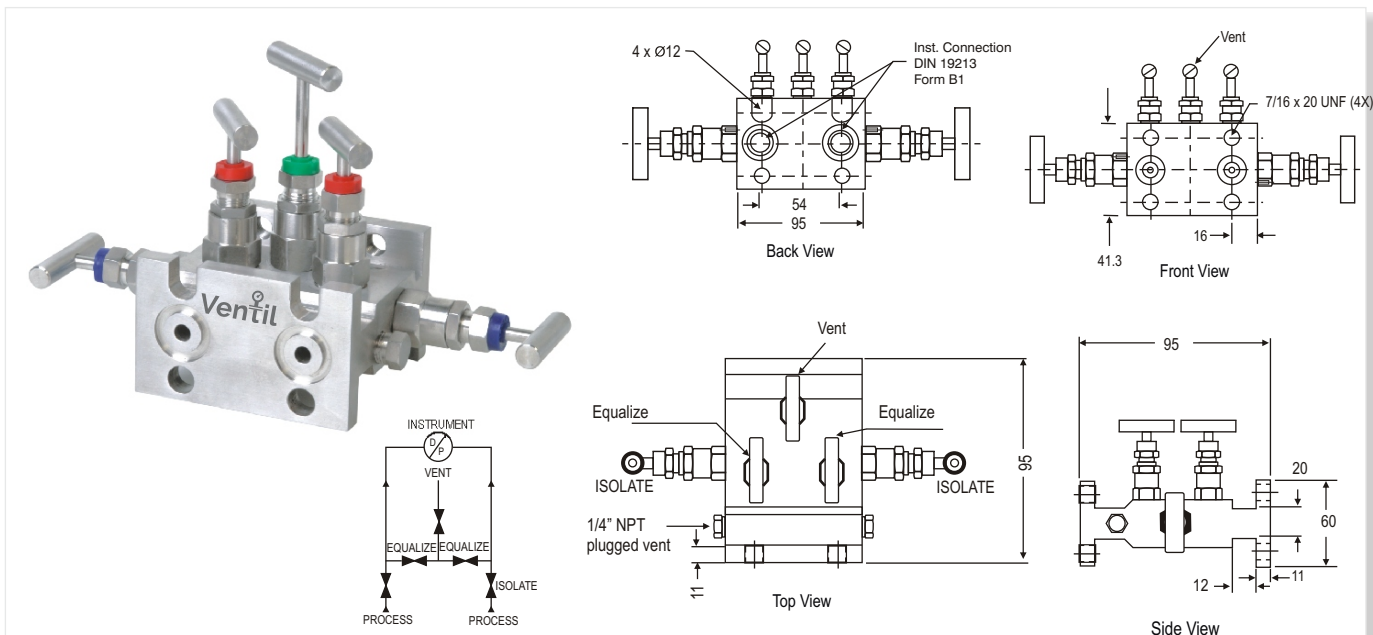

Standard Connection

Product	Process Side	Instrument Side	Vent/Test
K5VH	Flange	Flange	1/4" NPT female

FIVE VALVE MANIFOLDS

DIRECT MOUNT (PIPE TO FLANGE)

MODEL CODE : K5VN, K5VT, K5VK, K5VH

Specifications - Standard Version K5VN, K5VT, K5VK, K5VH

Body	: SS 316
Stem	: SS 316
Valve assembly	: SS 316
'T' bar handle	: SS 304
Maximum working pressure	: 6000 PSI
Maximum working temperature	: 240°C
Packing	: PTFE
Type of stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4" NPT [F]; provided with SS 316 plug
Hard Chrome plating	: Provided on stem tip.
Bracket mounting holes	: 4 Nos. With 12 mm ID.

HOW TO ORDER

BASIC MODEL : K5VN, K5VT, K5VK, K5VH

Body Material	Stem Type	Stem Packing	Size = Inlet x Outlet	Connections	Threads
C = Carbon Steel	CT (std)	P = PTFE (std)	4F= 1/2" x Flange	FD = Female x Flange (54mm)	N = NPT (ANSI B 1.20.1)
S = SS 316 (std)	DS	G = Grafoil	FF= Flange x Flange	DD = Flange x Flange	P = BSPP (BS 2779, ISO 228/1)
S4 = SS 304			2F = 1/4" x Flange	SW = Socket Weld	B = BSPT (BS 21, ISO 7/1)
SL = SS 316L					
M4 = Monel 400					
M5 = Monel 500					
H = Hastelloy C					

OPTIONS

- IE : Handle circular.
- TF : Compliance to NACE standard MR-0175.
- SG : For Oxygen service, valves are supplied cleaned, degreased and suitably packed.
- GH : Material test certificate
- GO : Hydro test certificate
- MB : Mounting Bracket
- MBC : Mounting bolts (7/16" UNF) in carbon steel (Model : MBC - M45, MBC - M25)
- MBS : Mounting bolts (7/16" UNF) in SS (Model : MBS - M45, MBS - M25)
- PRF : PTFE Ring For Flange Seal
- GRF : Grafoil Ring For Flange Seal
- BLD4 : Bleeder 1/4" NPT (Male)
- ATV : Anti Tamper valve
- ATK : Anti Tamper key

Ordering Example:

To place an order simply refer to the codes in the table.

Valve Type : Body Material + Stem Type + Stem Packing + Size + Connections + Threads + Options
K5VN + S + CT + P + 4F + FD + N + GH = K5VN-S-CT-P-4F-FD-N-GH

NOTE:

- The weld prepared types are available with female plain end - suitable for socket weld.
- Anti-tamper bonnet - special design on request with locking arrangement if desired.